

FIG. 1  
MACROSTRUCTURE  
A

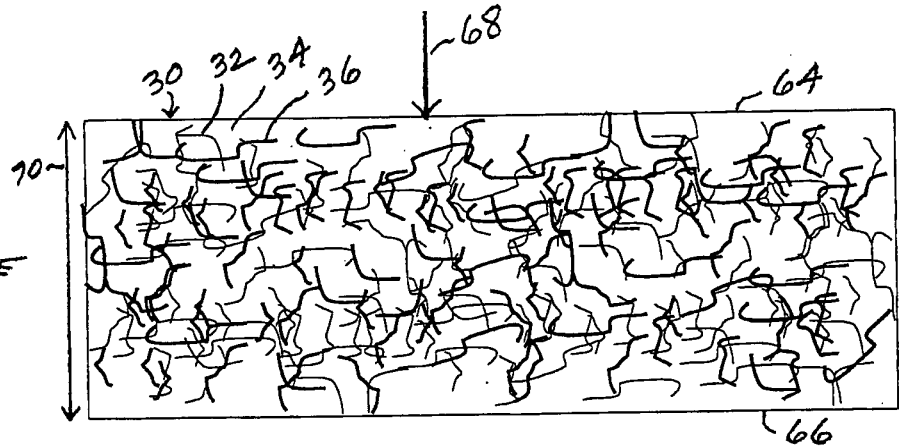


FIG. 2  
MACROSTRUCTURE  
B

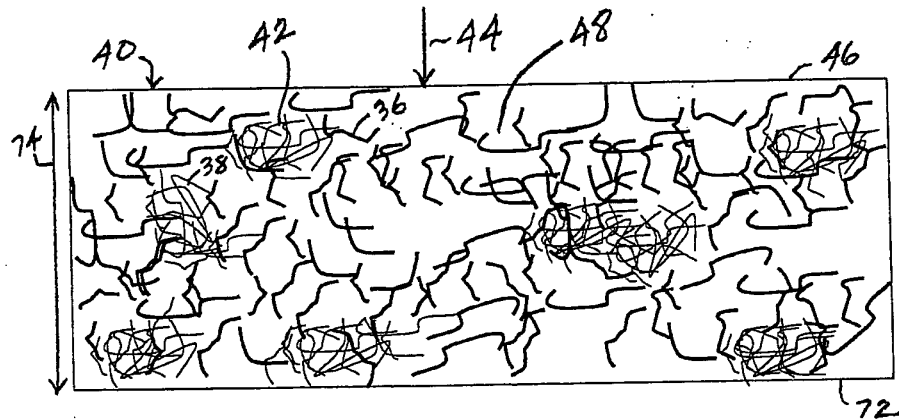


FIG. 3  
MACROSTRUCTURE  
C

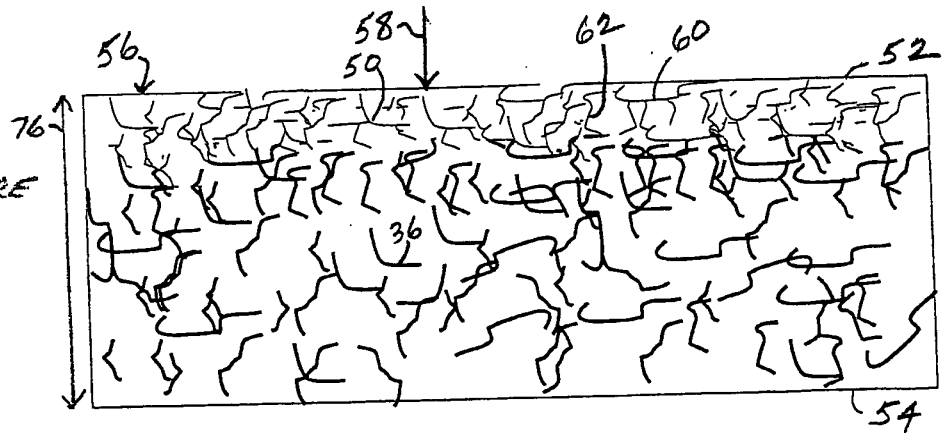


FIG. 4  
MICROSTRUCTURE  
1

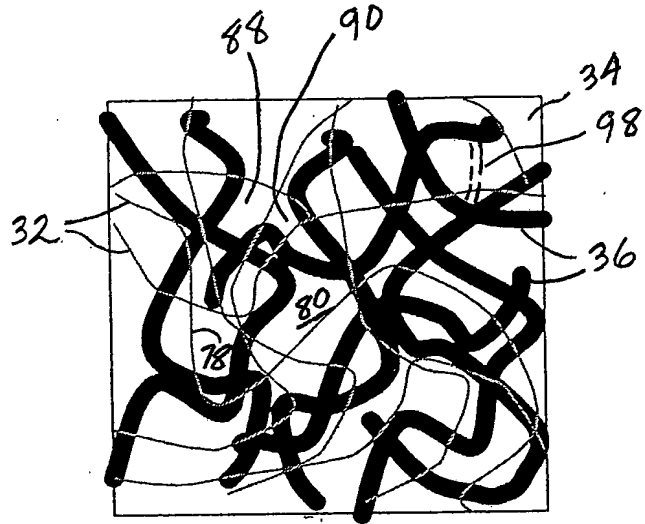


FIG. 5  
MICROSTRUCTURE  
2


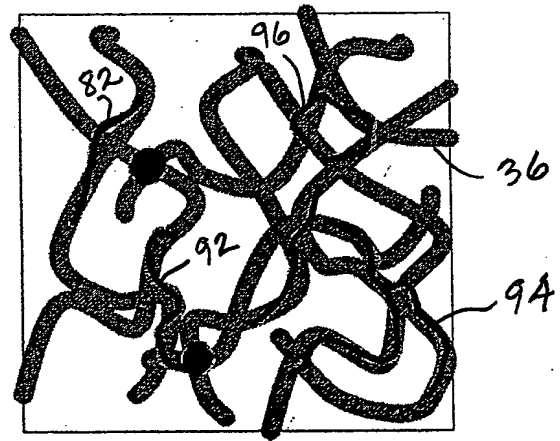


FIG. 6  
MICROSTRUCTURE  
3

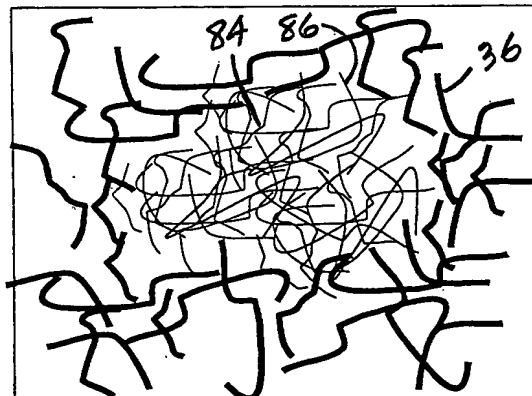

3/7

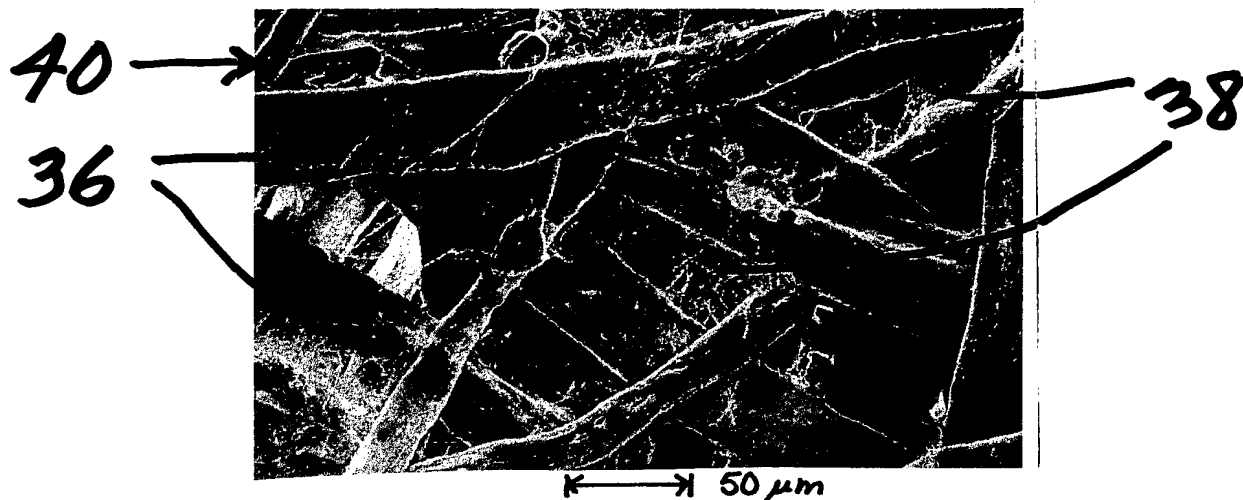


FIG. 7



FIG. 9 TEST MEDIA A



FIG. 10 TEST MEDIA C

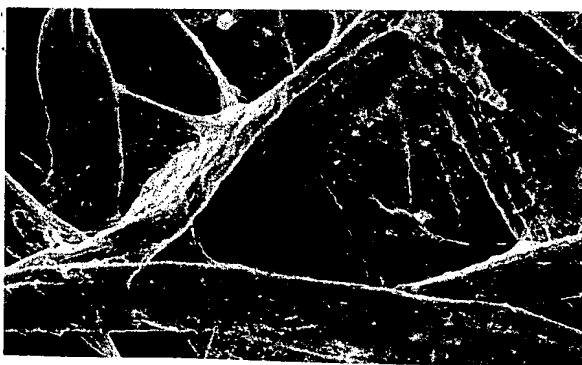


FIG. 11 TEST MEDIA D

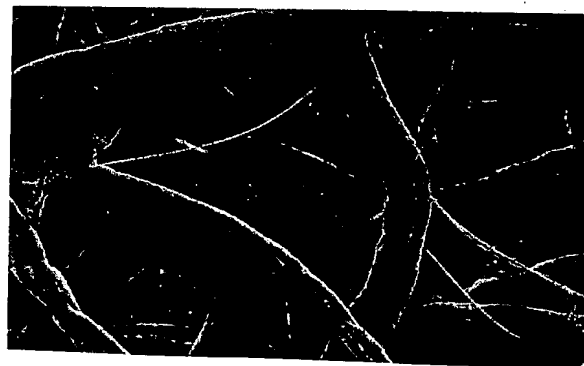


FIG. 12 TEST MEDIA E


# HIGH PERFORMANCE FILTER MEDIA WITH INTERNAL NANOFIBER STRUCTURE AND MANUFACTURING METHODOLOGY

Inventor(s): Barry M. Verdegan et al.  
Atty. Docket No. 4191-00308

4/7


Table 1. Characteristics of Sample Filter Media													
Media	Media Recipe	units	A	B	C	D	E	G	H	I	J	K	Commercial Fuel Filter-Grade Cellulose CF
Crestbrook bleached Northern Pine Pulp	Amount	g	4	4	3.5	4	4	5.5	5.5	5.5	5.5	6	
	Amount	g	3	2.75	2.5	3	2.75	6	6	5.5	5.5	6	
Buckeye Cellulose			none	polyester meltblown	polyester meltblown	acrylic nanofiber	706 glass	706 glass	Fibrillated Kevlar	Fibrillated Kevlar	polyester meltblown	nanofiber polyaramid	
Other			0.00	0.25	1.00	0.03	0.25	0.50	0.50	1.00	0.90	0.06	
	Amount	g	NA	1400-3300	1400-3300	100-500	800	800	500-4000	500-4000	1400-3300	200-600	NA
Macrostructure	Diameter	nm	NA	B	B	B	B	A	B	B	B	B	NA
Microstructure			NA	1	1	1	1	1	1	1	1	2	NA
Physical Properties													
	Basis Weight	g/m2	83.71	83.10	79.11	81.48	75.77	127.32	125.66	126.77	130.64	132.86	138.00
	Caliper	mm	0.36	0.32	0.33	0.33	0.36	0.84	0.59	0.84	0.84	0.61	0.55
	Frazier	fpm at 0.5 in. H2O											
	Permeability		40.3	27.4	15.2	10.0	12.4	14.5	29.0	19.0	23.0	25.0	17.0
	Mean Flow												
	Pore Size	µm	19.5	17.7	12.3	9.5	10.5	12.3	18.5	13.4	16.1	18.7	12.40
	Particle Size												
Fractional Efficiency (µm)													
	0.22	%	14.996	23.496	38.637	43.337	48.708						
	0.28	%	17.249	24.707	43.127	45.867	54.790						
	0.34	%	12.496	23.819	43.927	49.016	54.514						
	0.43	%	18.195	25.127	47.540	53.471	61.539						
	0.52	%	23.007	29.511	48.984	53.328	64.315						
	0.65	%	25.027	37.623	58.792	60.300	72.888						
	0.81	%	27.788	37.980	65.118	67.718	80.582						
	1.00	%	21.209	45.067	71.291	72.142	86.051						
	1.25	%	29.001	44.470	75.180	76.745	88.305						
	1.55	%	38.515	54.229	81.989	82.660	90.714						
	1.91	%	46.390	55.384	90.603	84.540	93.030						
	2.38	%	48.808	63.993	97.978	89.489	95.582						
	2.95	%	58.414	71.177	92.577	92.467	97.164						
	3.64	%	67.462	81.837	96.139	94.443	98.082						
	4.52	%	84.792	89.938	99.047	97.490	99.360						

FIG. 8

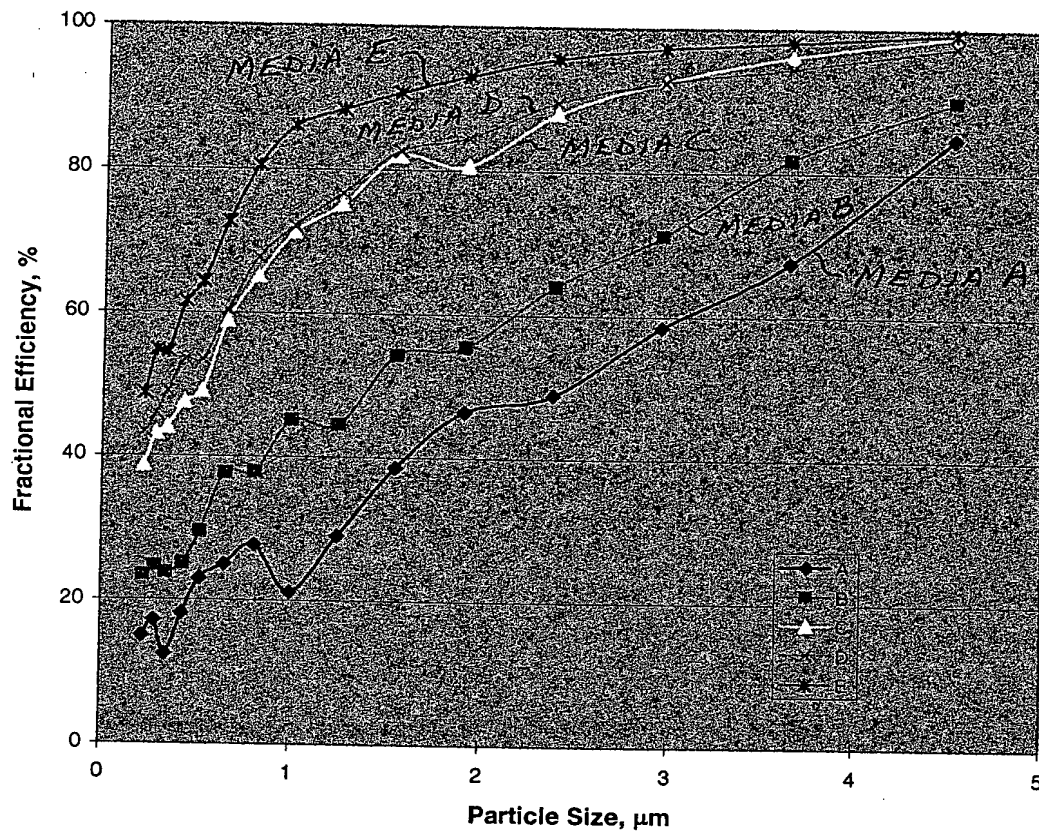


**Fig. 13** Fractional Air Filter Efficiency Results for Media Samples A, B, C, D, and E

6/7

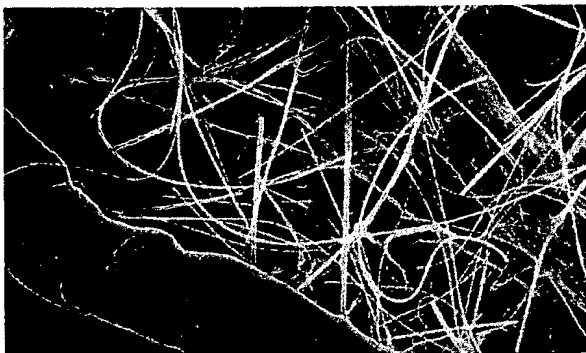


10 μm

FIG. 14 TEST MEDIA G

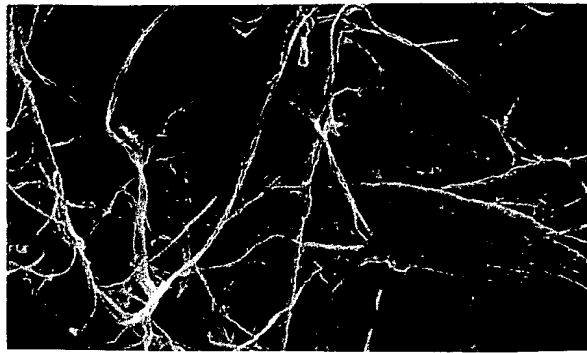

10 μm

FIG. 15 TEST MEDIA I

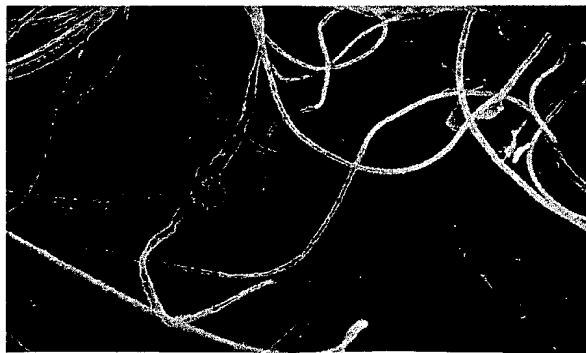

10 μm

FIG. 16 TEST MEDIA J



10 μm

FIG. 17 TEST MEDIA K



10 μm

FIG. 20 COMMERCIAL FUEL  
GRADE CELLULOSE MEDIA CF  
PRIOR ART

7/7

